



Overview

Size (mm)

External Frame	Door Leaf	Clear Opening
934 x 2060	818 x 2038	-
1034 x 2060	918 x 2038	-
1134 x 2060	1018 x 2038	-

Colour Grey Primer

Fixing/Installation Pre-drilled holes with screws to fix to RHS frame

Box Frame Container Door (Weld in)

Box Frame Container Doors are designed specifically for easy installation in shipping container modifications. They are supplied as standard with a high quality flush handle, Dormakaba lever handle or knob as standard.

These doors are pre-hung in the frame ready to face fix install in an RHS frame making them easy to install.

CERTIFIED TO THE CYCLONIC REGION D AUSTRALIAN STANDARD (AS/NZS 1170.2:2011).



Door Leaf

Door Depth 45mm Thickness

Material & Gauge 1.0mm galvanised steel

Insulation PU Foam & Steel Mesh Filling

Door Frame

Frame Depth 115mm Depth


Material & Gauge 1.4 mm Galvanised steel

Hinge

Hinge Qty & Type 4 Stainless Steel Ball Bearing Hinges

Lock

Main Lock Flush Lock

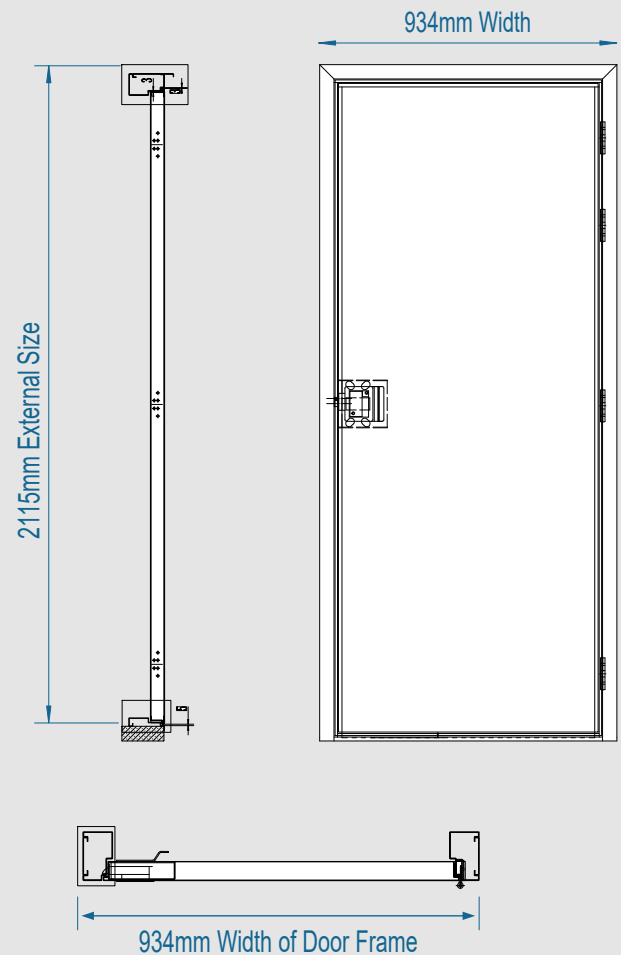

They are made of 1.0mm galvanised steel and 1.4mm galvanised steel frames, and have a fully welded frame with sealed joints. They are simple to install into a shipping container. Polyurethane foam (also known as PU foam) is injected into the door leaf and frame for increased insulation and rigidity, and three stainless steel butt hinges hold the leaf in the frame.

These doors are built to last and come with weather and draught-proof seals as standard. Dormakaba lever handle or knob is provided as standard.

The increased rigidity and overall strength of our Donga Door has contributed to a successful Cyclonic Region D Rating (AS/NZS 1170.2:2011).



Dormakaba Lever Handle and Knob



For more information please visit our website:
www.lathamsteeldoors.com.au or give us a call on +61 415 310 911

Latham's
STEEL DOORS AUSTRALIA